

Release date

15.01.2015

Product name / Part no.

VOLTRONIC® E59 MOTOR-ZCHUTZ / ENGINE PROTECTOR (CERAMIC)

Product appearance


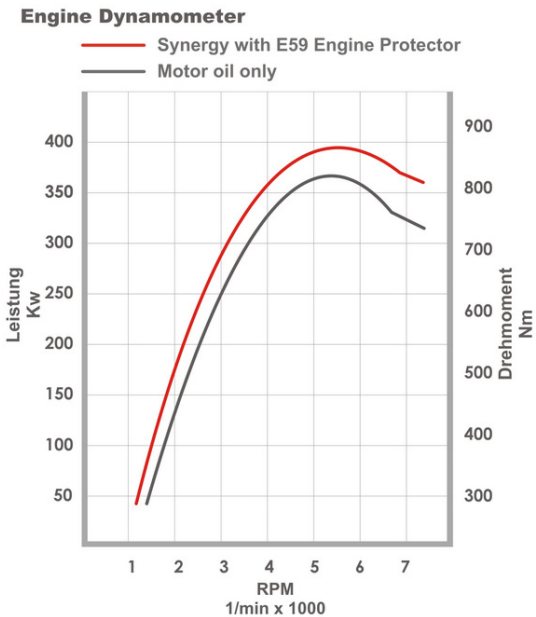


Packaging / content

Metal canister packaging / 300 ml

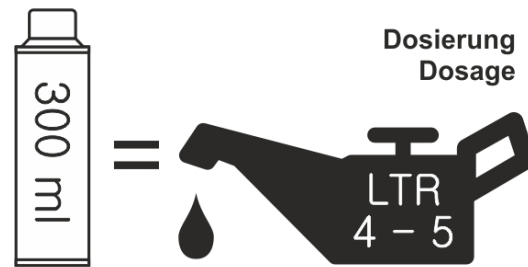
Country of origin

Made in Germany

<p>Manufacturer</p>	<p>VOLTRONIC GmbH Weidenweg 6 73087 Bad Boll Germany. Telefon (+49) 7164 9030 574 Telefax (+49) 7164 9039 268</p>																																								
<p>Compliance standard</p>	<p>DIN EN ISO 14001:2007 DIN EN ISO 9001:2008 TÜV THÜRINGEN</p> 																																								
<p>Product liability insurance</p>	<p>LVM insurance Germany.</p>																																								
<p>Usage area</p>	<p>VOLTRONIC ® E59 Engine Protector is high performance racing motor oil treatment based on Boron-Ceramic Nano-Technology. TÜV certified effectiveness for excellent in wear protection. Improves motor oil reliability, provide emergency running under critical condition. Promote and maintain smooth running engine. Features ▶ TÜV certified effectiveness for excellent in wear protection. ▶ Improves motor oil reliability. ▶ Improves motor oil shear stability. ▶ Provide emergency running under critical condition. ▶ Promote and maintain smooth running engine. Application ▶ Modern multi-cylinders and multi-valves gasoline and diesel engine with turbocharge or without. ▶ Racing competition engine. Usage Direction ▶ One bottle treat 4 to 5 litres motor oil.</p> <p>Engine Dynamometer</p>  <table border="1"> <caption>Estimated data from Engine Dynamometer graph</caption> <thead> <tr> <th>RPM (1/min x 1000)</th> <th>Power (Kw) - Synergy with E59</th> <th>Power (Kw) - Motor oil only</th> <th>Torque (Nm) - Synergy with E59</th> <th>Torque (Nm) - Motor oil only</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>50</td> <td>40</td> <td>300</td> <td>280</td> </tr> <tr> <td>2</td> <td>180</td> <td>140</td> <td>550</td> <td>500</td> </tr> <tr> <td>3</td> <td>300</td> <td>240</td> <td>750</td> <td>700</td> </tr> <tr> <td>4</td> <td>360</td> <td>300</td> <td>820</td> <td>780</td> </tr> <tr> <td>5</td> <td>380</td> <td>330</td> <td>850</td> <td>800</td> </tr> <tr> <td>6</td> <td>370</td> <td>320</td> <td>830</td> <td>780</td> </tr> <tr> <td>7</td> <td>350</td> <td>300</td> <td>800</td> <td>750</td> </tr> </tbody> </table>	RPM (1/min x 1000)	Power (Kw) - Synergy with E59	Power (Kw) - Motor oil only	Torque (Nm) - Synergy with E59	Torque (Nm) - Motor oil only	1	50	40	300	280	2	180	140	550	500	3	300	240	750	700	4	360	300	820	780	5	380	330	850	800	6	370	320	830	780	7	350	300	800	750
RPM (1/min x 1000)	Power (Kw) - Synergy with E59	Power (Kw) - Motor oil only	Torque (Nm) - Synergy with E59	Torque (Nm) - Motor oil only																																					
1	50	40	300	280																																					
2	180	140	550	500																																					
3	300	240	750	700																																					
4	360	300	820	780																																					
5	380	330	850	800																																					
6	370	320	830	780																																					
7	350	300	800	750																																					

Application

For Modern multi-cylinders and multi-valves gasoline and diesel engine with turbocharge or without. Also widely used for Racing competition engine.

Usage direction

One bottle treat 4 to 5 litres motor oil.

Physical and chemical characteristic

State	:	Liquid
Colour	:	Cream
Viscosity	:	Oily
Viscosity value	:	100 (ISO 3104/3105)
Relative density	:	0.8837

Disclaimer

The above information is believed to be correct but does not purport to be all inclusive and shall be used as guidance only. User must observe the usage direction, local regulatory authority and available MSDS/SDS (Material Safety Data Sheet/Safety Data Sheet). This Technical Data Sheet comprises complex high technology information about the product and might be update or change without prior notice. Please contact our technical support for more detail information.

Technical support email: support@voltronic-germany.com

Contact us

VOLTRONIC GmbH
Weidenweg 6
73087 Bad Boll
Germany.

Registergericht Ulm HRB 729440
USt.-Id.Nr.: DE289571328

Telefon (+49) 7164 9030 573
Telefon (+49) 7164 9030 574
Telefax (+49) 71649 039 268

info@voltronic-germany.com
www.voltronic-germany.com

Sales enquiry
sales@voltronic-germany.com